



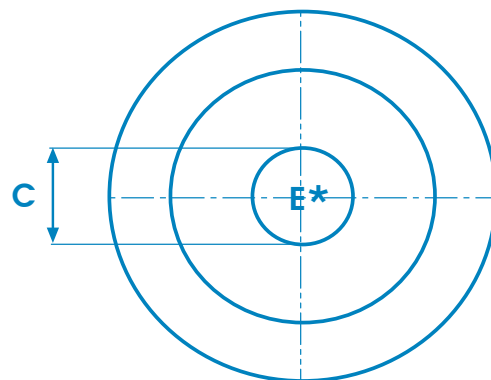


ANIMETTE DI ROTTURA IN LAMIERINO

TIPO **MTF**

Tipo	D mm.	A mm.	C mm.	H mm.	E cm2
MTF10	38	25	15	8	1,80
MTF16	38	25	15	8	1,80
MTF22	38	25	15	8	1,80
MTF29	52	35	17	11	2,30
MTF30	52	35	17	11	2,30
MTF32	38	25	15	8	1,80
MTF34	52	35	17	11	2,30
MTF39	52	35	17	11	2,30
MTF50	58	38	20	12	3,10
MTF75	58	38	20	12	3,10
MTF76	68	36	20	15	3,10
MTF82	58	38	20	12	3,10
MTF89	80	56	20	12	3,50
MTF115	64	38	19	10	2,80
MTF133	64	38	19	10	2,80
MTF153	80	56	20	12	3,50
MTF185	88	60	30	12	4,90
MTF232	88	60	30	12	4,90
MTF234	80	56	20	12	3,50
MTF261	96	66	25/30	13	4,90
MTF270	96	66	25	13	4,90
MTF333	96	66	25	13	4,90
MTF409	108	70	26/30	18	5,30
MTF474	126	80	41	16	13,20
MTF584	108	70	26/30	18	5,30
MTF674	108	70	26/30	18	5,30
MTF764	108	70	26/30	18	5,30
MTF774	126	80	29	18	6,60

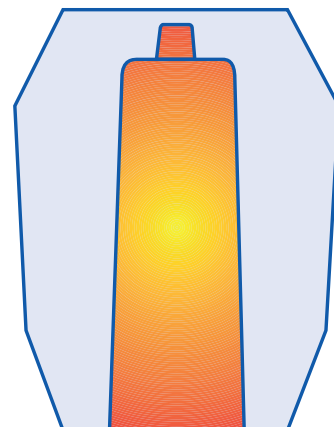

E* = Area di rottura

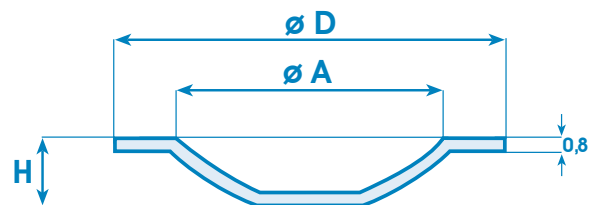

Data emissione:
LUGLIO 2015

Autorizzazione Direzione:

TOLLERANZE

D	A	C	H
± 1 mm	± 1 mm	± 1 mm	± 1 mm