




ANIMETTE DI ROTTURA IN MULLITE E CROMITE

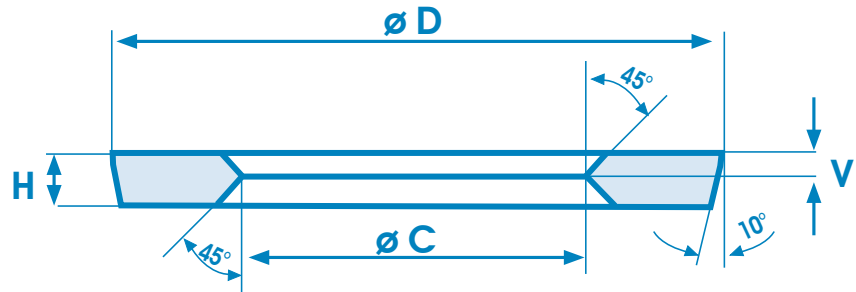

TIPO MU/CR

Tipo	D mm	H mm	C mm	V mm
MU100	110	11	70	5
MU110	136	11	77	5
MU120	150	14	88	5
MU130	160	15	91	5
MU140	170	14	98	5
MU150	180	14	105	5
MU160	200	14	112	5
MU180	212	16	126	5
MU200	235	16	140	5
MU220	255	16	154	5
MU250	290	16	175	5
CR300	350	20	210	5
CR350	400	20	245	7
CR400	450	25	280	12
CR450	505	30	315	15
CR500	555	40	350	15

Data emissione:
LUGLIO 2015

Autorizzazione Direzione:

TOLLERANZE

D	H	C	V
±2 mm	±2mm	±2mm	±2mm