




# KUPPELFÖRMIGE SPEISERN TERMIK ISOL 53 - ISOL 30

TYP **C**

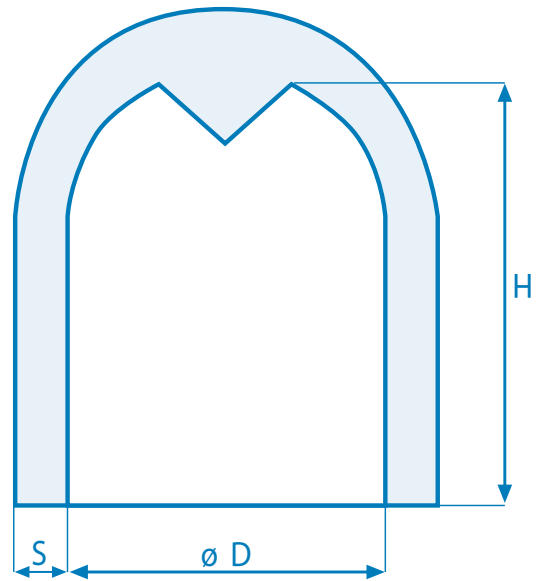

TYP	D mm	H mm	S mm	Volume dm <sup>3</sup>	Module Termik
C30	30	80	8	0,05	0,80
C1	40	100	8	0,12	1,00
C50	50	100	8	0,18	1,20
C2	60	120	8	0,31	1,60
C70	70	120	9	0,44	1,80
C3	80	120	9	0,54	2,00
C90	90	120	9	0,74	2,20
C4	100	150	10	1,05	2,50
C5	120	150	11	1,47	2,80
C6	140	180	13	2,41	3,40
C7	160	200	14	3,48	3,90
C8	180	230	15	5,09	4,50
C9	200	230	16	6,17	4,80
C220	220	230	16	7,68	5,20
C10	250	230	17	9,24	5,50
C11	300	250	18	14,13	6,10

Ausgabedatum  
JULI 2015

Genehmigung der  
Geschäftsleitung

## TOLERANZEN

GRÖSSE	DURCHMESSER	STÄRKE	HÖHE
30-120	± 5 mm	- 2 mm	± 15 mm
140-200	± 5 mm	- 2 mm	± 20 mm
220-300	± 5 mm	- 3 mm	± 30 mm