


## DOMED SLEEVES TERMIK ISOL 53 - ISOL 30

TYPE **C**

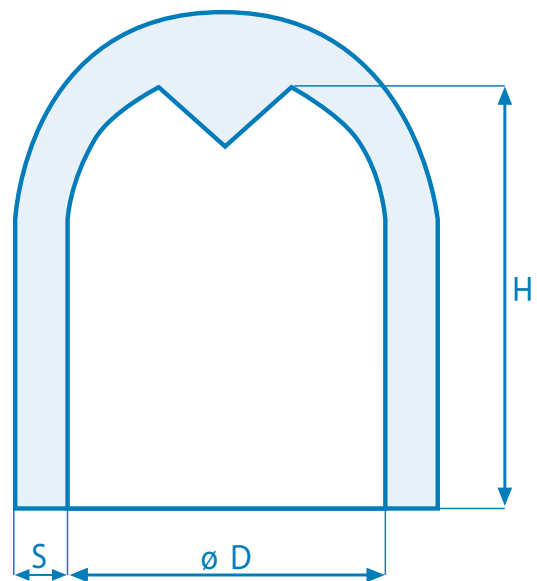

| TYPE | D mm | H mm | S mm | Capacity dm <sup>3</sup> | Termik Modulus |
|------|------|------|------|--------------------------|----------------|
| C30  | 30   | 80   | 8    | 0,05                     | 0,80           |
| C1   | 40   | 100  | 8    | 0,12                     | 1,00           |
| C50  | 50   | 100  | 8    | 0,18                     | 1,20           |
| C2   | 60   | 120  | 8    | 0,31                     | 1,60           |
| C70  | 70   | 120  | 9    | 0,44                     | 1,80           |
| C3   | 80   | 120  | 9    | 0,54                     | 2,00           |
| C90  | 90   | 120  | 9    | 0,74                     | 2,20           |
| C4   | 100  | 150  | 10   | 1,05                     | 2,50           |
| C5   | 120  | 150  | 11   | 1,47                     | 2,80           |
| C6   | 140  | 180  | 13   | 2,41                     | 3,40           |
| C7   | 160  | 200  | 14   | 3,48                     | 3,90           |
| C8   | 180  | 230  | 15   | 5,09                     | 4,50           |
| C9   | 200  | 230  | 16   | 6,17                     | 4,80           |
| C220 | 220  | 230  | 16   | 7,68                     | 5,20           |
| C10  | 250  | 230  | 17   | 9,24                     | 5,50           |
| C11  | 300  | 250  | 18   | 14,13                    | 6,10           |
|      |      |      |      |                          |                |
|      |      |      |      |                          |                |
|      |      |      |      |                          |                |

Date of issue  
JULY 2015

Board authorization

### TOLERANCES

| DIMENSION | DIAMETER | THICKNESS | HEIGHT  |
|-----------|----------|-----------|---------|
| 30-120    | ± 5 mm   | - 2 mm    | ± 15 mm |
| 140-200   | ± 5 mm   | - 2 mm    | ± 15 mm |
| 220-300   | ± 5 mm   | - 3 mm    | ± 15 mm |