




# VERENGTE SPEISERN TERMIK ISOL 53 - ISOL 30

TYP **T**

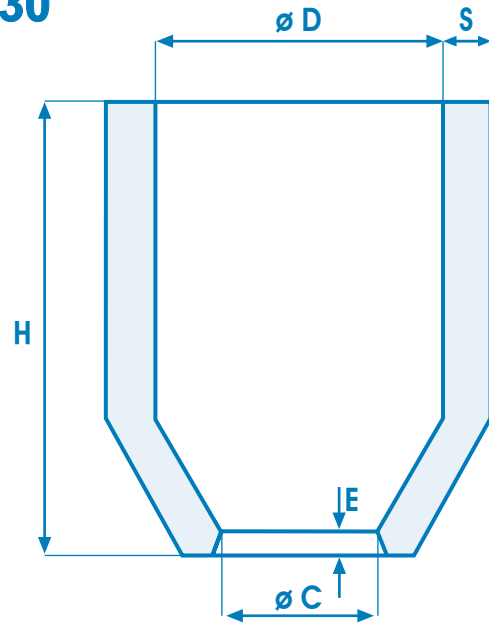

TYP	D mm.	C mm.	S mm.	E mm.	H mm.	Kapazität dm <sup>3</sup>	Termik-Modul
TS0	50	16	9	3	75	0,13	1,10
T0	50	25	9	3	98	0,18	1,35
T05	60	30	9	3	98	0,25	1,55
T1	75	37	10	3	98	0,40	1,90
T2	85	46	10	4	98	0,47	2,00
T2R	87	43	11	4	149	0,79	2,30
T3	95	47	12	4	152	0,92	2,60
T3R	95	48	12	4	175	1,14	2,70
T4	120	60	12	4	149	1,39	3,00
T4R	120	60	12	4	175	1,67	3,20
T4/5	149	70	14	5	165	2,46	3,40
T5	149	70	15	5	195	2,98	3,60
T5/6	175	86	17	5	200	3,95	3,90
T6	175	86	18	5	245	5,03	4,30
T7	198	98	19	5	246	6,42	4,70
T7R	198	98	20	6	300	7,95	4,90
T8	216	110	20	5	243	7,92	5,00
T8R	216	110	21	6	330	10,85	5,40
T9	252	124	22	6	300	12,12	5,70
T10	300	150	23	6	300	17,03	6,50
T11	355	175	24	6	300	22,51	7,20

Ausgabedatum  
JULI 2015

Genehmigung der  
Geschäftsleitung

## TOLERANZEN

GRÖSSE	DURCHMESSER	STÄRKE	HÖHE
30-100	± 5 mm	-2 mm	-10 mm
110-200	± 5 mm	-2 mm	-10 mm
220-300	± 5 mm	-3 mm	-10 mm
350-600	± 10 mm	-3 mm	-10 mm